


Military Fill Stand Multi-Connector Assembly

For Tanker Connection To Overfill Prevention Controls

Single Unit Housing With API Optic, API Thermistor and 4-Pole Connectors

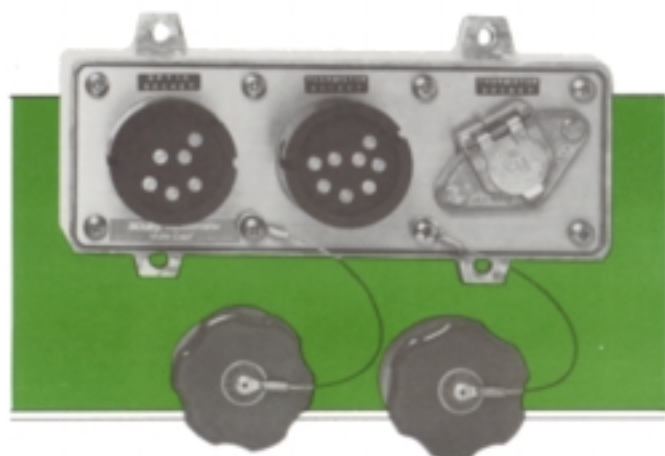

Military Fill Stand Multi-Connector Assembly

The Military Fill Stand Multi-Connector Assembly includes all three of the tanker socket styles common to military fueling operations to insure compatibility at the tanker fueling fill stand. They include:

- Optic API, standard WOGA₂ style connector.
- Thermistor API standard style connector.
- 4-Pole style connector.

The Military Fill Stand Multi-Connector Assembly is a single polished aluminum housing consisting of three overfill prevention control plug connectors. The connectors meet military specifications and match the API styles used at civilian loading terminals.

The lightweight assembly features a design which allows for repair in the event of damage from a drive-away. A surface hardened outer ring provides durability by preventing premature wear of the API style connector slots. API style connector pins are press fitted to prevent loss and are made of stainless steel to combat corrosion. The 4-Pole style split connector pins are brass plated.

The assembly is smaller in overall size and lighter in weight than three individual connector installations. This requires less room for mounting on the tanker vehicle. The single assembly housing also helps limit down-time during preventive maintenance and troubleshooting.

Connector Caps made of durable polyvinyl are included for API styles to help prevent dirt and grime from building on the connector face plate. They include a retaining strap that attaches to the connector housing to prevent loss. The 4-Pole style connector has an integral spring loaded cover.

Call 1-800-272-8559 or 1-617-729-7510 for technical assistance or to place your order.

Ordering Information

Fill Stand Multi-Connector Assembly with Optic, Thermistor and 4-Pole Connectors	08763
--	-------

Replacement Parts

API Optic connector without housing	01773-0631
API Thermistor connector without housing	01773-0621
4-Pole Connector without housing	27403
API Optic insert assembly	08337
API Optic retainer assembly	08338
API Thermistor insert assembly	08339
API Thermistor retainer assembly	08340
Blue optic polyvinyl API connector cap	08575
Green optic polyvinyl API connector cap	08574
Other replacement parts are available on request	

(API) American Petroleum Institute. Formerly (WOGA) Western Oil & Gas Association, Now (WSPA) Western States Petroleum Association.

Biclops, Dynacheck, Dynamic Self-Checking, Dynamic Self-Test, Faylsafe, Load Anywhere, Maxsafety, MulteCept, Scul-Lock, Scully, Scul-Tel, Scul-Tite, Scultrol, and TABS are registered trademarks of Scully Signal Company. Specifications are subject to change without notice.

Worldwide Contact
Scully Signal Company
70 Industrial Way
Wilmington, MA 01887 USA
Tel: 1-800-272-8559 or (617) 692-8600
Fax: (508) 692-8620
email: sales@scully.com
www.scully.com



67216

© Printed in the U.S.A. March 1994
printed on recycled paper

Setting New Standards In Safety

