



Plug & Cable Assembly

Safe and Reliable Rack to Vehicle Connection



Plug & Cable Assemblies

DESCRIPTION

Scully Plugs and Cables are used to connect the Scully loading rack control monitor to the vehicle mounted socket. The plugs and cables are the pathway for the control unit/sensor signals which monitor the status of the overfill prevention sensors in the vehicle compartments during loading operations.

Scully plugs are made of heavy duty molded polyurethane with stainless steel electrical contacts. The fuel resistant cables are available in 30' coiled or 20' straight styles. Scully plugs and cables are the product of years of industry experience and offer durable, efficient operation.

FEATURES AND BENEFITS

Molded glass-reinforced, polycarbonate contact block with positive locator keyways for easy disassembly and/or reassembly.

Non-removable socket locator pins fitted directly into the plug housing.

Virtually indestructible polyurethane plug shell, color coded to match Scully truck sockets.


Stainless steel electrical contact, spring loaded to insure proper contact with the truck socket pins.

Heavy-duty petroleum resistant cable with higher visibility and cold weather flexibility.

Compression strain relief spring prevents the cable from bending or crimping.

Crimped-on cable retention clamp prevents cable pull out or rotation.

Molded arrow on plug housing for easy visual alignment with socket.

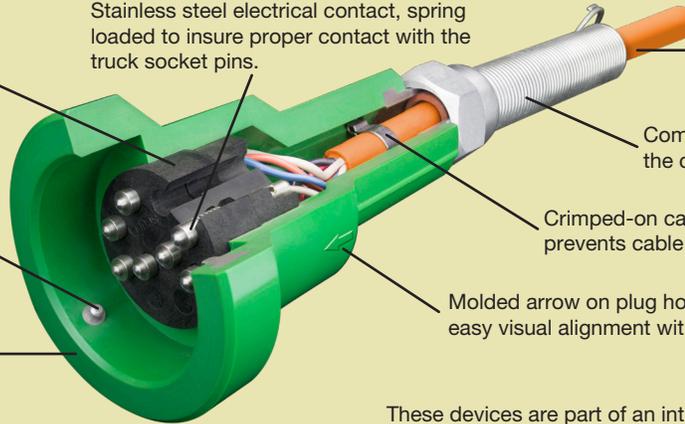

These devices are part of an intrinsically safe system certified by FM.

ORDERING INFORMATION

Plug & Cable Style	Plug & Coiled Cable	Plug & Straight Cable	Complete Plug	Plug Contact	Plug Housing	Coiled Cable	Straight Cable
8 Contacts / 2 J-Slot Pins, Green Plug / Orange Cable for Intellitrol®2 or ST-15	21818	20830	20769	22290	22330	31097	20834
6 Contacts / 3 J-Slot Pins, Blue Plug / Blue Cable for Intellitrol®2 or ST-35	21831	21764	21766	21772	22331	31099	31098
6 Contacts / 2 J-Slot Pins, Blue Plug / Blue Cable for Intellitrol®2 or ST-35	21821	21820	21819	21772	22329	31099	31098
7 Contacts, J560 Plug / Orange Cable for Intellitrol®2 or ST-15	20403	31107	20461	N/A	N/A	31097	20834
10 Contacts / 2 J-Slot Pins, Green Plug / Orange Cable for Intellitrol®2	31092	20831	20767	20758	22330	31097	20834
10 Contacts / 4 J-Slot Pins, Green Plug / Orange Cable for Intellitrol®2	N/A	22482	22485	31506	31620	N/A	22431
10 Contacts / 4 J-Slot Pins, Black Plug / Blue Cable for Intellitrol®2	N/A	22484	22487	31506	31623	N/A	22431

REPLACEMENT PARTS

SPECIALS

Cable Guard Strain Relief 5/8", Orange Cable Assembly	20847	10 Contacts / 2 J-Slot Pins, Green Plug / 60' Orange Cable	20831M2
Cable Guard Strain Relief 1/2", Blue Cable Assembly	20986	10 Contacts / 2 J-Slot Pins, Green Plug / 40' Orange Cable	20831M3
2 Ear Strain Relief, Orange Cable Assembly	27529	6 Contacts / 3 J-Slot Pins, Blue Plug / 40' Blue Cable	21764M1
2 Ear Strain Relief and Bushing, Blue Cable Assembly	27530 / 57066	6 Contacts / 3 J-Slot Pins, Blue Plug / 50' Blue Cable	21764M3
2 Ear Strain Relief, Blue Euro Cable Assembly	27530	8 Contacts / 2 J-Slot Pins, Green Plug / 50' Orange Cable	21818M3
Replacement Contact Pin (Except J560 Plug)	07782	7 Contacts, J560 Plug / 50' Orange Cable	31107M1

Copyright © 2018 Scully Signal Company. Dynacheck, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, IntelliCheck, Intellitrol are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

60614 Rev F
July 2016



Scully Signal Company
70 Industrial Way
Wilmington, MA 01887, USA
800 272 8559 • sales@scully.com

Scully Systems Europe NV
Maanstraat 25
2800 Mechelen, Belgium
+32 (0) 15 56 00 70 • info@scully.be

Scully UK Ltd
Meridian House, Unit 33
37 Road One Winsford Industrial Estate,
Winsford Cheshire CW7 3QG, UK
+44 (0) 1606 553805 • sales@scullyuk.com